




200convection cooled

DIBUJO

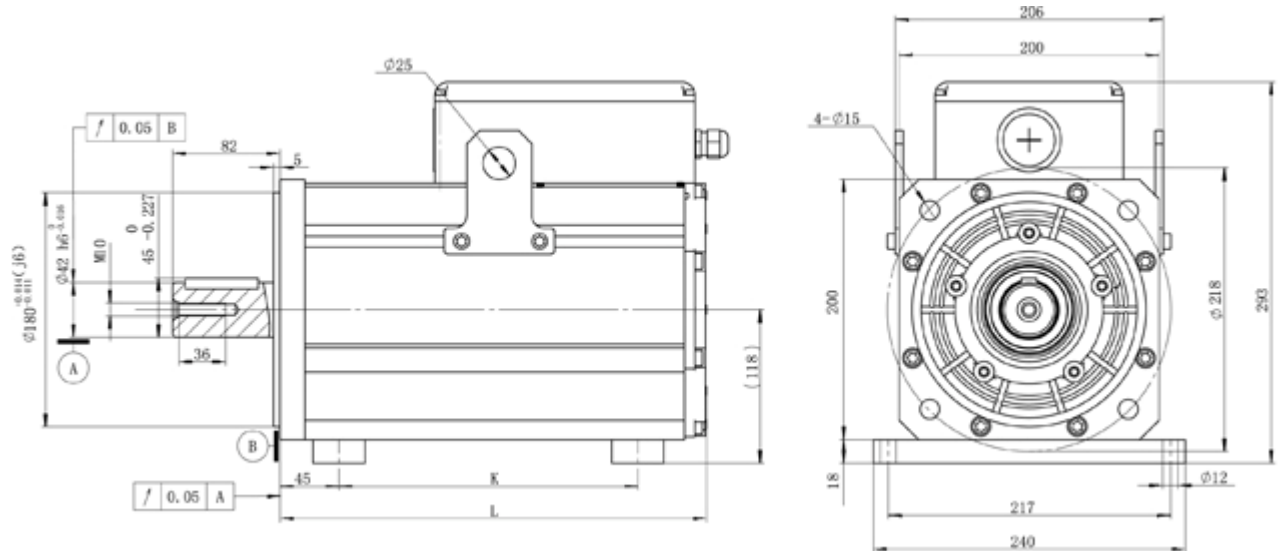

DETALLES DEL PRODUCTO

	35N-m	48N-m	70N-m	89N-m	
L[mm]	295	330	406	485	
K[mm]	190	230	305	380	
Product Model	Rated Torque	Rated Speed	Rated Power	Rated Current	IP Grade
	N-m	rpm	KW	A	
ABL-SB200295-01A	35	2000	7.5	15	IP45
ABL-SB200295-02A	35	1700	6.2	13	IP45
ABL-SB200295-03A	35	1500	5.5	11	IP45
ABL-SB200295-04A	35	1300	4.7	10	IP45
ABL-SB200295-05A	35	1000	3.7	8	IP45
ABL-SB200330-01A	48	2000	11	20	IP45
ABL-SB200330-02A	48	1700	8.5	18	IP45
ABL-SB200330-03A	48	1500	7.5	16	IP45
ABL-SB200330-04A	48	1300	6.5	13	IP45
ABL-SB200330-05A	48	1000	5.5	10	IP45
ABL-SB200406-01A	70	2000	15	28	IP45
ABL-SB200406-02A	70	1700	12	26	IP45
ABL-SB200406-03A	70	1500	11	21	IP45
ABL-SB200406-04A	70	1300	9.5	19	IP45
ABL-SB200406-05A	70	1000	7.5	15	IP45
ABL-SB200485-01A	89	2000	18.5	35	IP45
ABL-SB200485-02A	89	1700	13	28	IP45
ABL-SB200485-03A	89	1500	12	23	IP45
ABL-SB200485-04A	89	1300	9.2	18	IP45