




**GM13-050SK**

**DIBUJO**

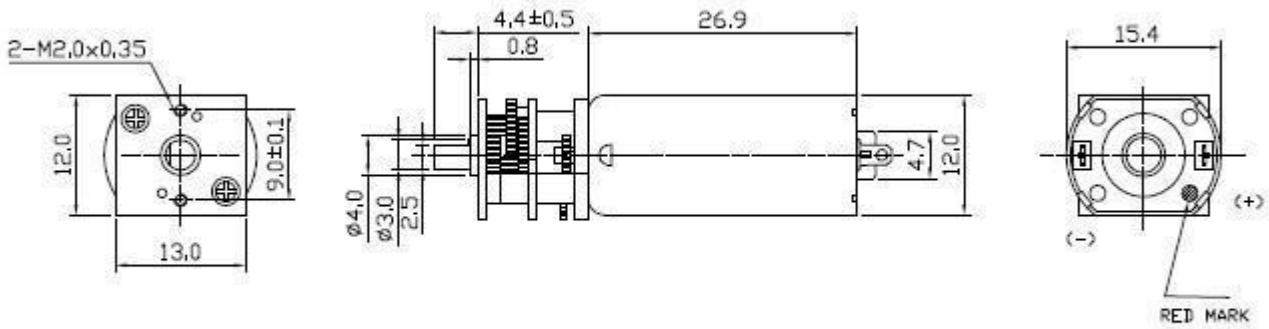

UNIT : Millimeters WEIGHT : 22 g (APPROX)

**CARACTERISTICAS**

MODEL	REDUCTION RATIO	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
		OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT		
		VDC	VDC	RPM	A	RPM	A	mN.m	g.cm	W	mN.m	g.cm	A
GM13-050SK	09250	150	5.0-11.5	8.0	52	0.06	40	0.20	980	1000	392.2	4000	0.50
	09250	250	5.0-11.5	8.0	31	0.06	25	0.20	156.9	1600	637.3	6500	0.50
	11170	150	1.5-9.0	7.0	66	0.096	52	0.28	127.5	1300	392.2	4000	0.90
	11170	250	1.5-9.0	7.0	40	0.096	33	0.28	196	2000	490	5000	0.90
	13130	150	2.0-4.0	4.0	50	0.10	40	0.29	88.2	900	392.2	4000	0.90
	13130	250	2.0-4.0	4.0	30	0.10	24	0.29	147	1500	588.2	6000	0.90