




**GM16-FF030VA**

**DIBUJO**

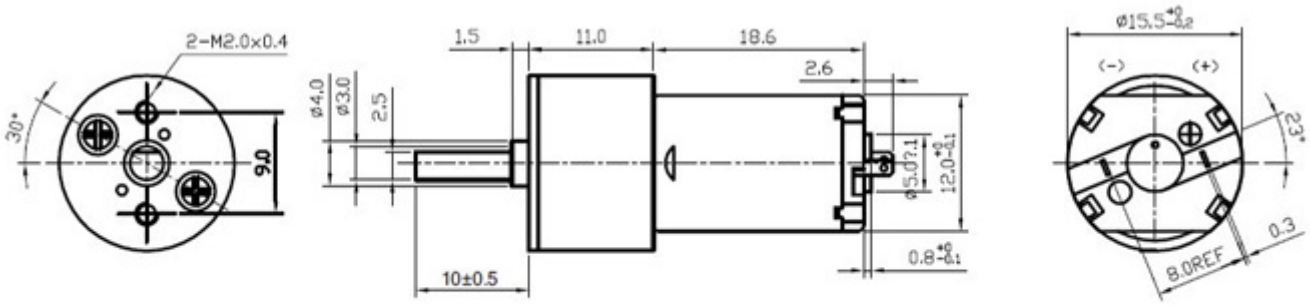

UNIT: Millimeters

WEIGHT: 20g (APPROX)

**CARACTERISTICAS**

MODEL	REDUCTION RATIO	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL		
		OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT	
		VDC	VDC	RPM	A	RPM	A	mN.m   g.cm	W	mN.m   g.cm	A	
GM16-FF030VA	08250	39.6	1.0-6.0	5.0	262	0.08	202	0.19	16.67   170		49.02   500	0.50
	08250	356.4	1.0-6.0	5.0	28	0.08	24	0.19	147.1   1500		441.2   4500	0.50
	09210	26.4	3.0-6.0	5.0	395	0.085	300	0.21	11.8   120		39.2   400	0.60
	09210	174.2	3.0-6.0	5.0	60	0.085	42	0.21	78.4   800		274.5   2800	0.60